



New InBest Pro 2.0

The new InBest Pro 2.0 has been developed to deliver superior performance when cutting a wide range of graphic materials, from the most flexible to the most demanding semi-rigid substrates.

Improved Lifting System



Version 2.0 features a completely redesigned mechanism that significantly enhances usability and cutting precision.

Parallel Movement to the Base


The head guide lifts perfectly parallel to the base, maintaining alignment with the material's surface. This ensures full visibility of the cutting line along the entire length of the cut, regardless of the material's thickness.

Semi-Raised Position

The semi-raised position keeps the cutter securely suspended just above the material, eliminating the need for manual support. This system enables more accurate guide alignment, improves user ergonomics, and increases overall cutting efficiency.

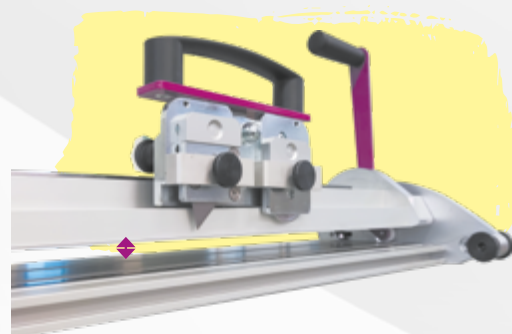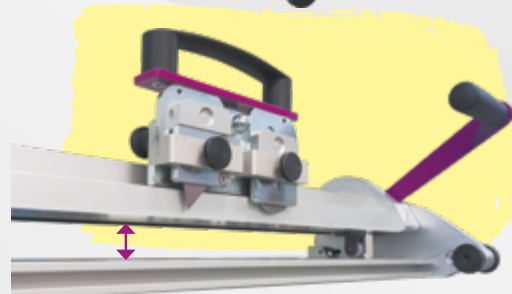

PRECISION AND VERSATILITY. STRENGTH AND EASE OF USE

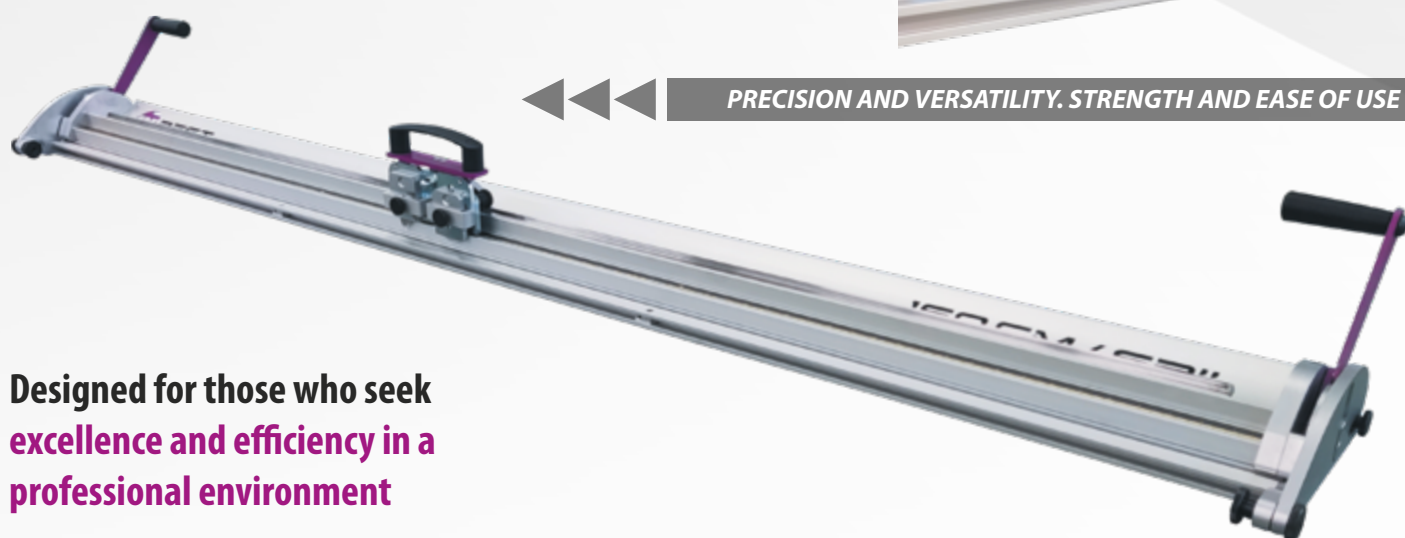

Designed for those who seek excellence and efficiency in a professional environment

High Precision

Exclusive linear bearing system. Robust construction with integrated aluminium base. Designed for continuous and demanding professional use.

Double Cutting Base

Narrow slot for standard blade (general use) and cutting base for circular blade. Easily switch between both positions depending on the required cutting type.

Integrated Lifting System

Facilitates material loading and positioning, increasing productivity. The equipment must be secured to a table or workbench.

	72 68 02 Basic 110	72 68 03 Basic 160	72 68 04 Basic 210	72 68 05 Basic 260	72 68 06 Basic 320
	72 68 12 Twin 110	72 68 13 Twin 160	72 68 14 Twin 210	72 68 15 Twin 260	72 68 16 Twin 320
Cutting length	110 cm / 44"	160 cm / 63"	210 cm / 82"	260 cm / 102"	320 cm / 126"
Length (A)	138 cm / 55 "	188 cm / 74 "	238 cm / 93"	288 cm / 113 "	348 cm / 137 "
Width (B)	15,8 cm / 6,22 "				
Weight Basic	9,2 kg / 20 lb	12 kg / 26,4 lb	14,8 kg / 32,6 lb	18 kg / 40 lb	21,7 kg / 47 lb
Weight Twin	9,8 kg / 21,6 lb	12,6 kg / 28 lb	15,4 kg / 34 lb	18,6 kg / 41 lb	26,5 kg / 57 lb
Packing dimensions	154 x 26 x 32 cm	204 x 26 x 32 cm	254 x 26 x 32	304 x 26 x 32 cm	364 x 26 x 32 cm
Packing weight Basic	14 Kg	18 Kg	22,50 Kg	25,50 Kg	30 Kg
Packing weight Twin	14,50 Kg	18,50 Kg	23 Kg	26 Kg	30,50 Kg

	72 68 32 Pro 2.0 110	72 68 33 Pro 2.0 160	72 68 34 Pro 2.0 210	72 68 35 Pro 2.0 260	72 68 36 Pro 2.0 320
Cutting Length	110 cm / 44"	160 cm / 63"	210 cm / 82"	260 cm / 102"	320 cm / 122"
Length (A)	147 cm / 58 "	197 cm / 77.5 "	247 cm / 97.24 "	297 cm / 117 "	357 cm / 140.5 "
Width (B)	22,5 cm / 8,86 "				
Weight	16 kg / 35 lb	20,5 Kg / 45 lb	26 kg / 57 lb	32 kg / 70.5 lb	45,7 kg / 99 lb
Packing dimensions	154 x 26 x 32 cm	204 x 26 x 32 cm	254 x 26 x 32 cm	304 x 26 x 32 cm	364 x 26 x 32 cm
Packing weight	20 Kg	26 Kg	31 Kg	38 Kg	45 kg

	Table Pro 110	Table Pro 160	Table Pro 210	Table Pro 260	Table Pro 320
Length	143.2 cm / 56.4"	193.2 cm / 76.1"	243.2 cm / 95.7"	293.2 cm / 115.4"	353.2 cm / 139.1"
Width	100 cm / 39.4"		120 cm / 47.2"		
Height	90 cm / 35.4"				
Packing dimensions	154 x 16 x 32 cm	204 x 16 x 32 cm	254 x 16 x 32 cm	304 x 16 x 32 cm	364 x 16 x 32 cm
Packing weight	30 Kg	36 Kg	48,50 Kg	54 Kg	66,50 Kg
Board dimensions*	143.2 x 83.3 cm	193.2 x 83.3 cm	243.2 x 103.3 cm	293.2 x 103.3 cm	353.2 x 103.3 cm
Board thickness**	19 mm				

* The dimensions shown are those we recommend for the table top to fit into the space between the machine and the table frame, although it can be made to protrude from the table frame. The table top is not included, nor is it supplied or manufactured by Inglet. ** Recommended thickness for the table top to be at the same height as the machine.

ACCESSORIES

Semi-rigids cutting head (included)	45 22 95
Circular blade cutting head (included)	45 22 96
Acrylic cutting head	45 22 92
Reverse cutting head	45 22 93
Extra blade cutting head	45 22 94
Table mount elevator for InBest Basic & Twin (1 set)	45 22 01
InBest squaring and measuring arm	14 22 10
Trapezoid blades -100 u-	13 01 30
Circular blade -1 u-	13 01 26
Acrylic scoring blade -5 u-	13 01 47

WORKBENCH FOR INBEST PRO

InBest Pro 110 + complete workbench	72 68 42
InBest Pro 160 + complete workbench	72 68 43
InBest Pro 110 workbench	14 22 12
InBest Pro 160 workbench	14 22 13
InBest Pro 110 workbench material catcher	14 22 22
InBest Pro 160 workbench material catcher	14 22 23
InBest Pro 110 work bench roll holder	14 22 32
InBest Pro 160 work bench roll holder	14 22 33

TABLE FOR InBest PRO

Table for InBest Pro, 110 cm	14 22 02
Table for InBest Pro, 160 cm	14 22 03
Table for InBest Pro, 210 cm	14 22 04
Table for InBest Pro, 260 cm	14 22 05
Table for InBest Pro, 320 cm	14 22 06

RIGIDS

	Max. Thickness
PVC Foamboard	5 mm / 10 mm **
Acrylics / Plexiglas®	4 mm * / ◇

SEMI-RIGIDS

	Max. Thickness
Foamboard	13 mm / 20 mm *
Cardboard	13 mm / 20 mm *
Honeycomb / Re-board®	13 mm / 20 mm *
Corrugated plastic	13 mm
Passepartout	✓

FLEXIBLES

	Grosor máximo
Fabric / Textiles	✓
Plastic film	✓
Banner materials	✓
Paper	✓
Vinyl	✓
Magnetic sheets	✓

* Optional accessory required. ** The Pro model allows cutting without any problems. In the Basic and Twin models it is possible, but not for daily use. ◇ Score and snap.



INGLET SLU, Av. de Cervera, 21 E25300 TÀRREGA (Lleida) Spain
Tel. +34 973 312 312 Whats. +34 607 662 285 export@inglet.com
www.ingletmachinery.com / www.inglet.com / www.ingletledframes.com